



CONTEMPORARY DECK MOUNT TUB FILLER WITH HANDSHOWER


Features


- Tub filler maximum flow rate: 15 gpm (56.8 L/min) at 60 psi Handshower flow rate: 2.0 gpm (7.6 L/min) or 1.8 gpm (6.8 L/min)
- Handshower bracket may be placed on COLD or HOT side of body
- 1/4 turn ceramic disc cartridges
- All brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1 CEC (1.8 gpm) / DOE (2.0 & 1.8 gpm) Commonwealth of MA
- ADA compliant (with lever handles)
- EPA Watersense handshower (2.0 gpm)
- Local codes may require installation of an upstream tempering valve

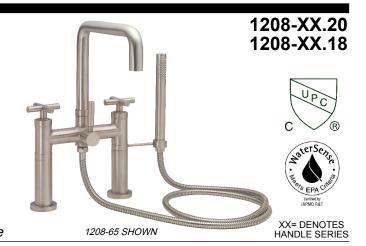

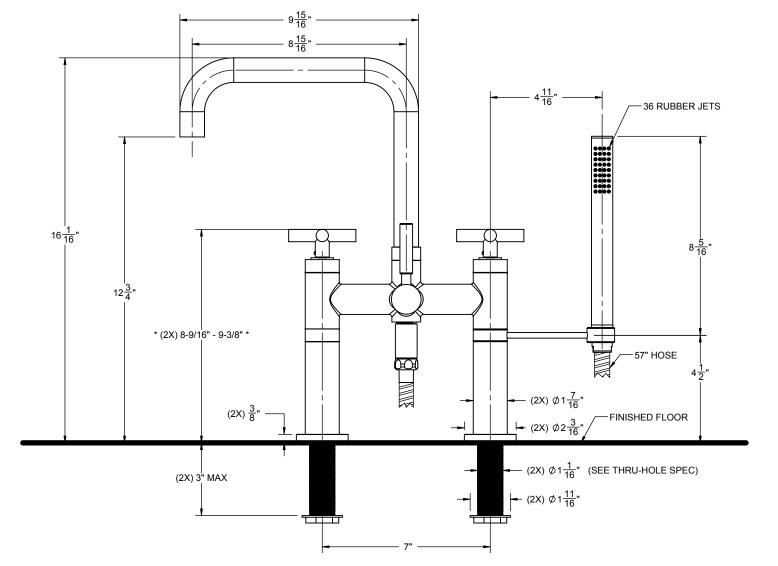

THROUGH-HOLE SPECIFICATIONS MIN **RECOMENDED** MAX

Ø 1-1/16" Ø 1-5/16"

Ø 1-3/8"

* = DIMENSION VARIES BASED ON HANDLE SERIES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"