

Sunstruck® Freestanding Bath K-24002

Features

- Freestanding design creates a striking focal point in your bathing area.
- Oval-shaped basin offers a graceful and spacious bathing experience.
- Sloped lumbar support on both ends.
- 16-inch bathing depth offers a deep soaking experience.
- Wide deck along one side simplifies installation and provides support for getting in and out of bath.
- Fluted shroud.
- Textured bottom surface.
- Center drain.

Material

Acrylic

Installation

Freestanding

Recommended Products/Accessories

K-7265 Clearflo Bath Drain

K-37383 30" Rough-in Cable Bath Drain

K-37386 rough-in cable drain, PVC, 30" cable

K-24916 Wireless Music Kit

K-T37391 Bath Cable Drain Trim

K-T37392 Bath Cable Drain Trim

K-T37393 Bath Cable Drain Trim

K-T37394 Bath Cable Drain Trim

K-T37395 Bath Cable Drain Trim

K-T37396 Bath Cable Drain Trim

K-T37397 Cable Bath Drain Trim



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty KOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

0 White 96 Biscuit







Sunstruck®

Freestanding Bath K-24002


No change in measurements if connected with drain illustrated. (K-37386)


Recommended Faucet Location

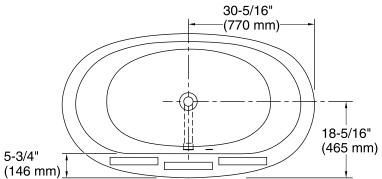



Recommended Faucet Hole Location

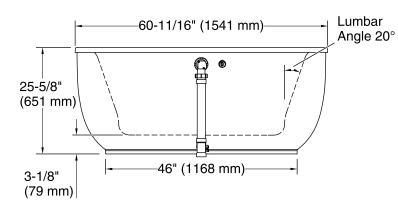



Technical Information

All product dimensions are nominal. Installation: Freestanding

Drain location: Center

Basin area, bottom: 39-5/8" x 23-5/8" (1006 mm x 599 mm)
Basin area, top: 49-9/16" x 25-1/2" (1259 mm x 648 mm)

Weight: 170 lbs (77.1 kg)

Minimum floor load: 49.8 lbs/ft² (243.1 kg/m²)

Water depth: 16" (406 mm)
Water capacity: 60 gal (227.1 L)

Template: Footprint, 1364288, not required, not

included

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

