Pull-out single-handle kitchen sink faucet K-30612



Features

- Two-function pull-out sprayhead with touch-control allows you to switch from aerated stream to spray.
- ProMotion® technology's light, quiet braided hose and balljoint swivel make the pull-out sprayhead easier and more comfortable to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- 7-1/2" (191 mm) rotating spout.
- Single lever handle makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.

Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- Single- or three-hole installation (escutcheon included).
- Flexible supply lines simplify installation.

Adapters, Rough-in and Extension Kits

1327990 Range: 2-1/2" (64 mm) - 4-5/8" (117 mm)

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

1012715 Kitchen Faucet Deep Rough-In Kit



ADA CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.





Jolt™ Pull-out single-handle kitchen sink faucet K-30612

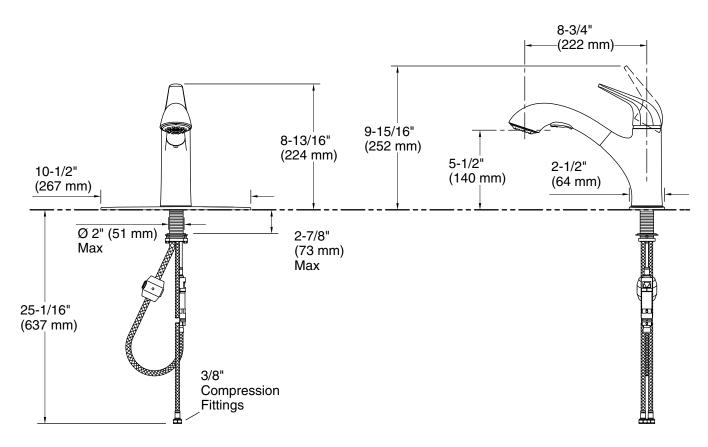

Technical Information

All product dimensions are nominal.

Drain included: No

Notes

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

