KOHLER_®

Highline[®] Comfort Height[®]

two-piece elongated 1.28 gpf toilet K-3999-RA

Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Comfort Height[®] feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gallons per flush (gpf).
- Right-hand Polished Chrome trip lever included.
- Combination consists of the K-4467-RA tank and the K-4199 bowl.

Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- Class Five[®] flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.

Installation

- Standard 12-inch rough-in.
- Three-bolt installation.
- Seat and supply line not included.

Water Conservation & Rebates

- WaterSense[®] toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.

Recommended Products/Accessories

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C³®-230 elongated cleansing toilet seat K-5420 Low-Profile Bolt Caps K-9379 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

Included Components

Product consists of: K-4199 Comfort Height® Elongated Bowl K-4467-RA Toilet tank, 1.28 gpf Additional Components: Bolt cap accessory pack Tank cover Trip lever





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


| 0 | White |
|----|---------|
| 96 | Biscuit |
| 47 | Almond |





Highline[®] Comfort Height[®]

two-piece elongated 1.28 gpf toilet K-3999-RA

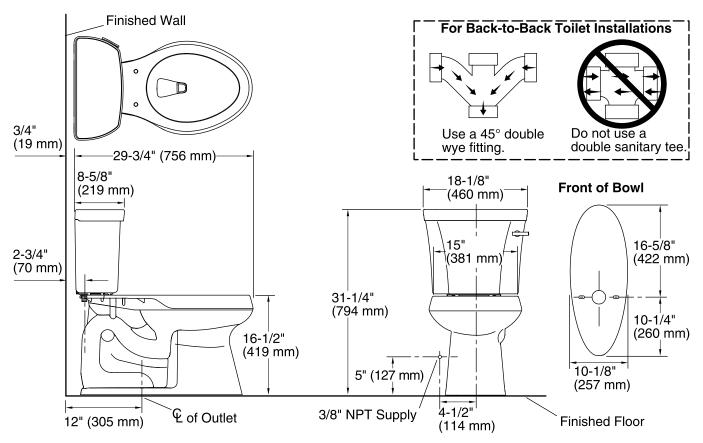

Technical Information

| All product dimensions are nominal. | |
|-------------------------------------|--|
|-------------------------------------|--|

| Toilet type: | Two-piece, Floor-mount |
|-----------------------|--------------------------------|
| Waste Outlet: | Floor |
| Bowl shape: | Elongated |
| Flush type: | Class Five® |
| Trap passageway: | 2-1/8" (54 mm) |
| Water Consumption | |
| Full: | 1.28 gpf (4.8 lpf) |
| Water surface size: | 11-3/8" x 8" (289 mm x 203 mm) |
| Rim to water surface: | 5-3/8" (137 mm) |
| Rough-in: | 12" (305 mm) |
| Seat-mounting holes: | 5-1/2" (140 mm) |
| | |

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

