

# Kingston™

Rear spud flushometer bowl K-4323

#### **Features**

- Vitreous china.
- Elongated bowl.
- Siphon jet.
- Wall-mount.
- 1-1/2" rear spud.
- 1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf) depending on flushometer specified.
- 10-1/2" (267 mm) x 9" (229 mm) water area.
- 26-1/2" (673 mm) x 16-1/2" (419 mm) x 13-1/4" (337 mm).

### **Recommended Replacements**

This product is replaced by 84323.

#### **Included Components**

Additional Components:

Spud





CSA B651 ADA Codes/Standards

**OBC** 

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 **OBC** 

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
1212	7	Black BlackTI






# Kingston™

# Rear spud flushometer bowl **K-4323**

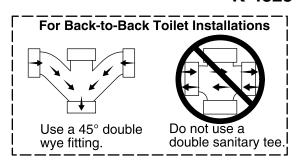

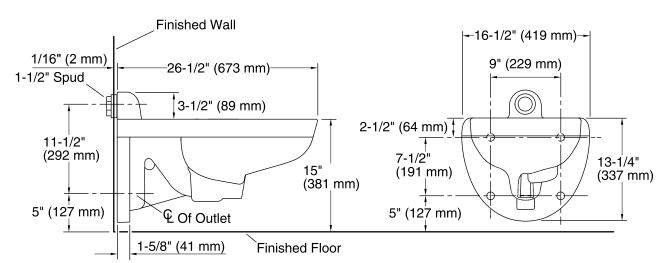

#### **Technical Information**

All product dimensions are nominal.

Toilet type: Flushometer, Wall-mount

Waste Outlet: Wall

Flush type: Siphon jet

Spud size: 1-1/2", Inlet, Rear Trap passageway: 2-1/8" (54 mm)

Water Consumption

Reduced: 1.28 gpf (4.8 lpf)

Water surface size: 10-1/2" x 9" (267 mm x 229 mm)

Rim to water surface: 5-1/4" (133 mm) Seat-mounting holes: 5-1/2" (140 mm) **Fixture Supply Requirements** 

Min static pressure: 35 psi (241.3 kPa)
Max static pressure: 80 psi (551.6 kPa)
Min flowing pressure: 25 psi (172.4 kPa)
Min flow rate: 25 gpm (94.6 lpm)

#### **Notes**

Install this product according to the installation instructions.

Refer to manufacturer's instructions and local codes for flushometer requirements.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

