

Composed®

Sliding shower door K-706080-L

Features

- Sleek, exposed stainless steel roller design allows for effortless opening and closing of the sliding panel
- Frameless design emphasizes glass and creates a sleek, minimalist look
- Full-length magnetic seal keeps door firmly closed, providing excellent water containment
- Back-to-back 11-1/2" (292 mm) vertical handles
- Coordinates with other products in the Composed® collection
- CleanCoat® technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots

Material

- Frameless, heavy 3/8" (10 mm) thick Crystal Clear tempered glass door and in-line panel
- Anodized aluminum prevents rust and corrosion

Installation

- 78" (1981 mm) high, with a lofty 74-7/8" (1902 mm) minimum head clearance
- Fits opening widths 44-5/8" 47-7/8" (1133 mm 1216 mm)
- 3-3/4" (95.25 mm) width adjustment
- Out-of-plumb adjustability simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- Product ships in two boxes, offering easy handling
- For residential use only
- Not for use in hospitality
- Not for use with cast iron shower bases

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Product consists of: 706080-ML 706080-FL



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Glass Options Code Description


L Crystal Clear







Sliding shower door K-706080-L

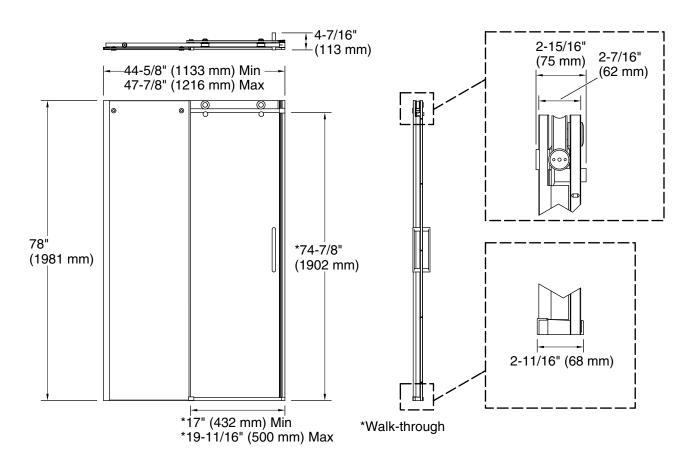

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - 44-5/8" (1134 mm)

Min:

Opening Width - 47-7/8" (1216 mm)

Max:

Walk-through - Min: 17" (432 mm)

Walk-through - Max: 19-11/16" (500 mm)

Base-To-Wall 3/8" (10 mm)

Radius - Max:

Glass thickness: 3/8" (10 mm)
Glass coating: CleanCoat

Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 80" (2032 mm) to allow for installation clearance.

