

Technology

- Frameless, 1/4-inch-thick Frosted tempered glass.
- Improved bypassing mechanism for smoother feel.
- Solid-metal contemporary towel bar design.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Reversible top track offers a choice of curved or flat profile.
- Out-of-plumb adjustability for easy installation.

Installation

- Sliding shower door.
- Not for use in hospitality.

Included Components

Additional Components:
Hardware kit



Codes/Standards

CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	SHP	
--	-----	--


	MX	
--	----	--

	ABZ	
--	-----	--

Available Glass Options

Code	Description
------	-------------

D3	Frosted
----	---------

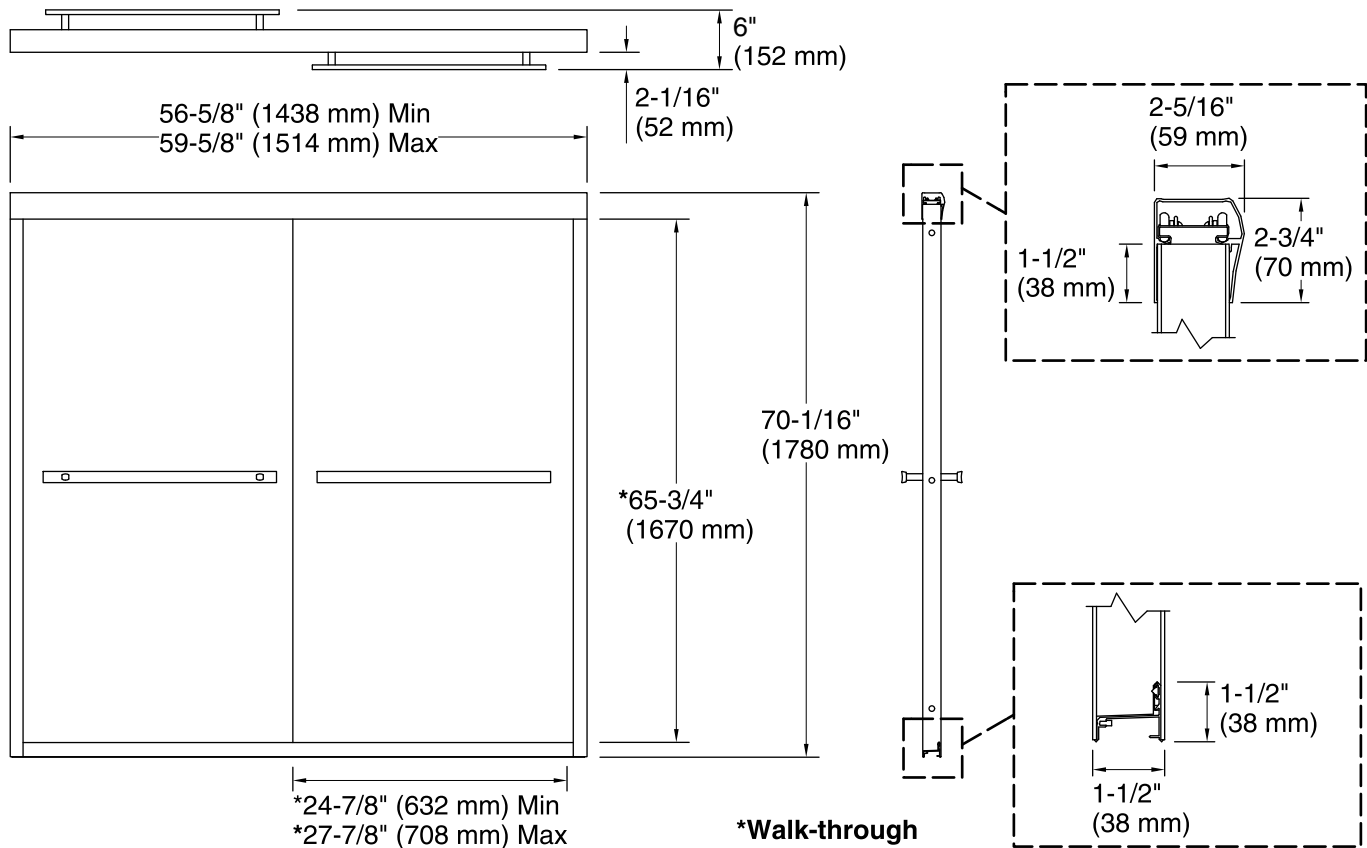

Technical Information

All product dimensions are nominal.

Installation type:	For shower base installation
Opening style:	Sliding/Bypass
Opening Width - Min:	56-5/8" (1438 mm)
Opening Width - Max:	59-5/8" (1514 mm)
Walk-through - Min:	24-7/8" (632 mm)
Walk-through - Max:	27-7/8" (708 mm)
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 71-13/16" (1824 mm) to allow for installation clearance.