Purist®

KOHLER, Faucets

Pull-Out Kitchen Sink Faucet K-7506

Features

- Three-function pull-out sprayhead with touch-control allows you to switch between spray, laminar flow, and pause.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- High-arch gooseneck spout and 360-degree spout rotation offer superior clearance for filling pots and cleaning.
- Single lever handle is simple to use and makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)]

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- For single-hole installation.
- Flexible supply lines simplify installation.

Recommended Products/Accessories

K-77685 Single-Cartridge Water Filtration System K-77686 Double-Cartridge Water Filtration System K-77687 single replacement filter cartridge K-77688 Replacement Filter Cartridges, Two-Pack



ADA CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992

California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|--------------------------|
| | CP | Polished Chrome |
| | SN | Vibrant® Polished Nickel |
| | VS | Vibrant® Stainless |
| | BI | Matte Black |





Purist® Pull-Out Kitchen Sink Faucet K-7506

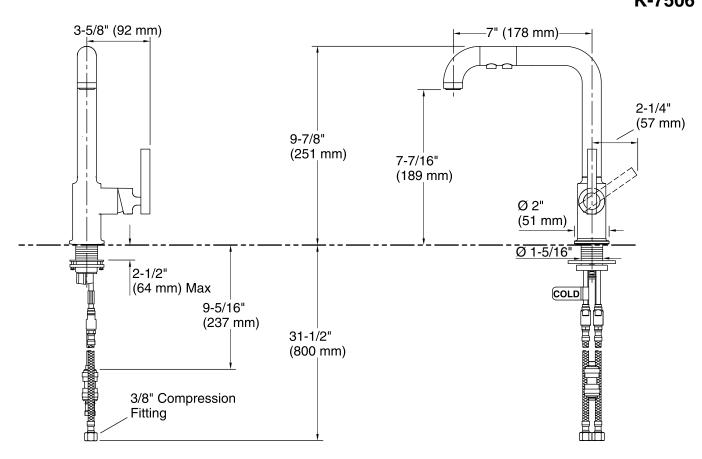

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)
Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

