KOHLER Faucets

1.75 gpm multifunction handshower **K-R75562-G**

Features

- Advanced spray engine provides five alternate experiences: wide coverage, intense drenching, targeted spray and two combination sprays.
- Full coverage spray features angled nozzles to produce allencompassing coverage for everyday use.
- Intense rinse delivers a forceful spray ideal for thoroughly rinsing soap from hair.
- Powerful massage spray is a focused stream that targets sore muscles, or use as a utility spray to rinse kids, pets, and your shower.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- Simple thumb tab smoothly transitions between sprays.
- 1.75 gpm (6.6 lpm) flow rate for handshower.

Material

KOHLER finishes resist corrosion and tarnishing.

Installation

- Bath- or deck-mount.
- 1/2" 14 NPSM connection.

Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:

60" hose

Handshower

Handshower holder





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

CP Polished Chrome
BN Vibrant® Brushed Nickel



Radiate®

1.75 gpm multifunction handshower K-R75562-G

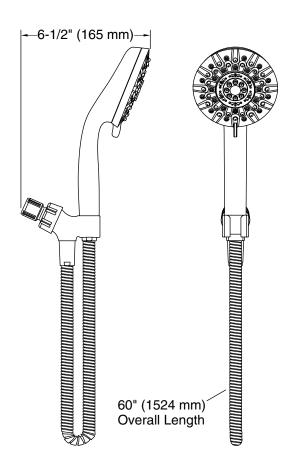

Technical Information

All product dimensions are nominal.


Drain included: No

Handshower:

1.75 gal/min (6.6 l/min) Rated maximum

flow:

Pressure: 45 psi (3.1 bar)

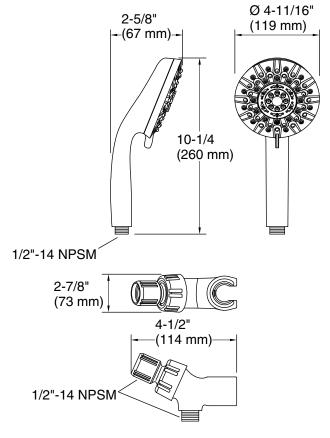

Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Consult local plumbing officials. OBC compliant when installed to the specific requirements of these regulations.

