KOHLER, Faucets

Parallel™ Rite-Temp® shower trim K-TS23503-4G

Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations.
- Provides anti-scald protection and temperature regulation.
- Single handle controls both on/off activation and temperature settings.
- Single-function 1.75 gpm (6.6 lpm) shower head with Katalyst® air-induction technology.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- Coordinates with other products in the Parallel collection.

Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

Technology

 Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray.

Installation

 Trim only; requires valve to complete installation (sold separately).

Required Products/Accessories

K-8304-K Valve Body & Cartridge Kit Complete

or

K-8304-KS Valve Body & Cartridge Kit Complete

or

K-8304-PS Valve Body & Cartridge Kit Complete

or or

K-8304-PX Valve Body & Cartridge Kit Complete K-8304-US Valve Body & Cartridge Kit Complete

or

K-8304-UX Valve Body & Cartridge Kit Complete

or

K-P8304-K Valve body and cartridge kit complete

or

K-P8304-KS Valve Body & Cartridge Kit Complete

or

K-P8304-SWX Valve Body & Cartridge Kit Complete

or

K-8300-K Valve Body Rough-In

K-8305 Pressure Balance Cartridge

or

K-8300-KS Valve Body Rough-In

K-8305 Pressure Balance Cartridge

or

K-8300-PX Valve Body Rough-In

K-8305 Pressure Balance Cartridge









Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Code	Description
CP	Polished Chrome
BN	Vibrant® Brushed Nickel
BL	Matte Black
	CP BN



KOHLER, Faucets

Parallel™

Rite-Temp® shower trim K-TS23503-4G

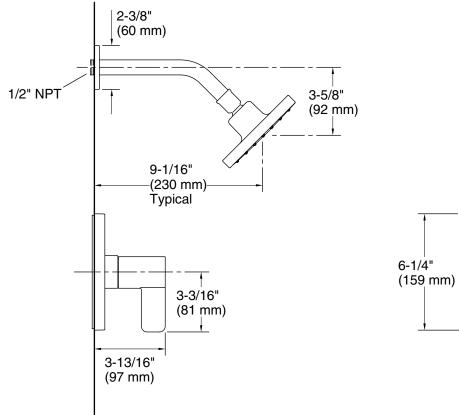

6-1/4" (159 mm)

6-1/4"

Technical Information

All product dimensions are nominal.

Drain included: No

Showerhead/Body Spray:

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 45 psi (3.1 bar)

Notes

Install this product according to the installation instructions.

