


#om063

Thermostatic rough-in with 2 push button controls



Can add independent control
 Integrated service stops, filters & back-flow preventers
 Rough-in can be mounted horizontally or vertically
 100% flow when on
 13 GPM (49.2 L/min.)
 Extension available

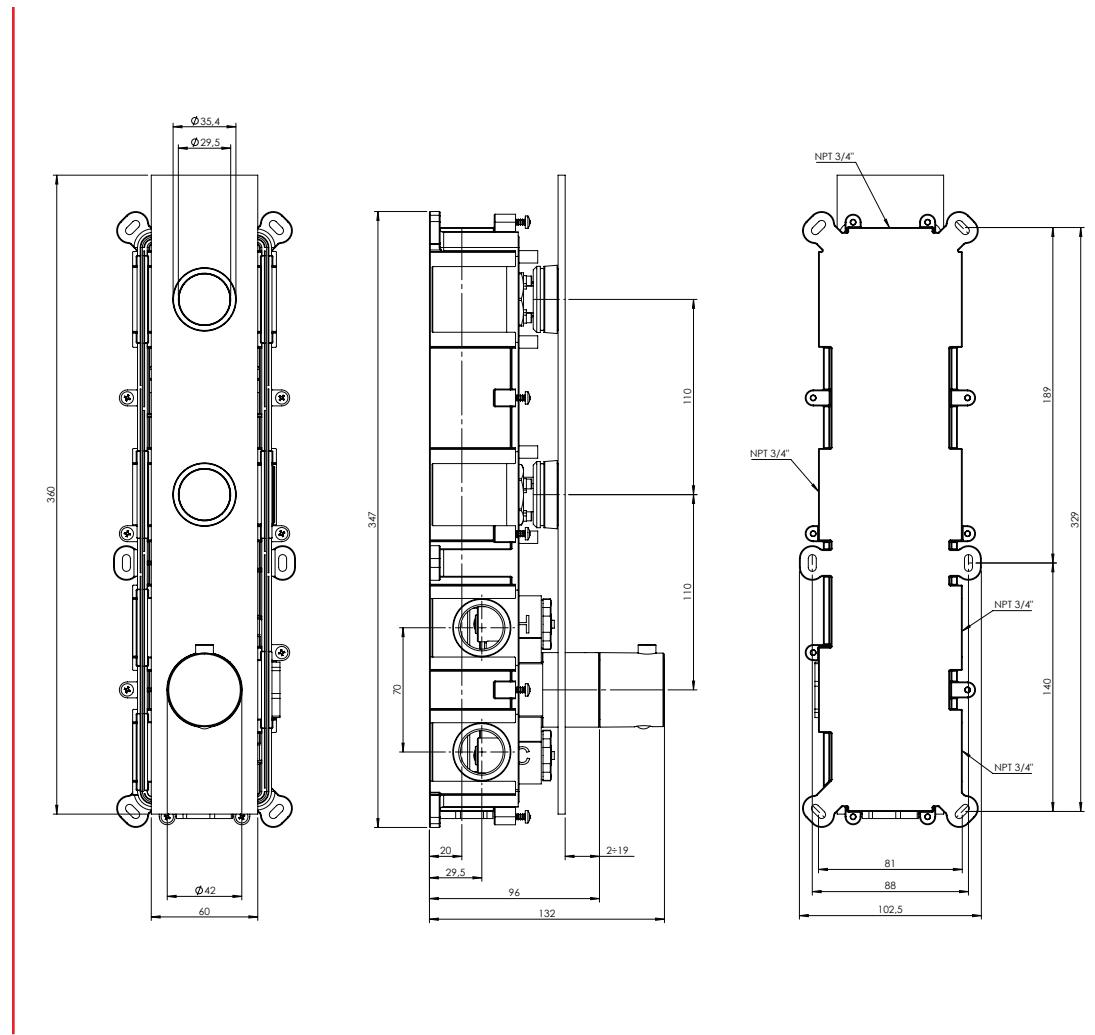