

# **b** BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

## BOULEVARD® PEDESTAL SINK VITREOUS CHINA

### **BOULEVARD® PEDESTAL SINK**

	0641.800	Faucet	holes	on 8"	(203mm)	centers	(Illustrated)
_							

- ☐ **0641.400** Faucet holes on 4" (102mm) centers
- **□ 0641.100** Center hole only
  - Classic styled rectangular pedestal lavatory
  - Vitreous china
  - · Rear overflow
  - Supplied with mounting kit
  - Right Height® for greater comfort during use
  - Faucet ledge with large deck area (faucet not included)
  - Design coordinates with Boulevard® Toilet
  - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

## **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

0641.008	Pedestal	top-8"	(203mm)	centers
0641.004	Pedestal	top-4"	(102mm)	centers
0641.001	Pedestal	top-ce	nter hole	only
0010.000	Pedestal	only		

### **Bowl sizes:**

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

# **Compliance Certifications - Meets or Exceeds the Following Specifications:**

ASME A112.19.2 - 2008/CSA B45.1-08


To Be Specified:
☐ Color: ☐ White ☐ Linen
☐ Faucet Finish:
☐ Supplies:
☐ 1-1/4" Trap:
☐ Nipple:

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

<sup>\*</sup> See faucet section for additional models available




### **TOP VIEW (ALL THREE CONFIGURATIONS)**

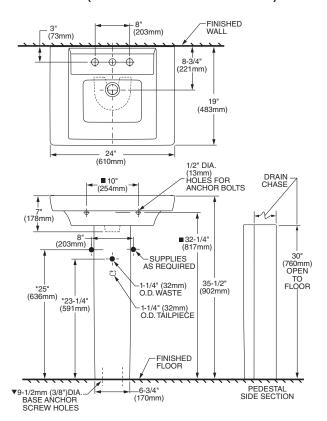

PEDESTAL CONFIGURATION (NOT ADA COMPLIANT)

### **ABOVE COUNTER CONFIGURATION**

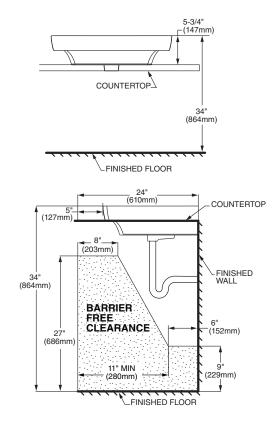

**DROP-IN SINK CONFIGURATION** 



ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE **BUILDINGS AND FACILITIES - CHECK LOCAL CODES.** 

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.